


Tolerance on all dimensions in millimetres: +/- 0.1mm unless stated otherwise.  
Inches shown in brackets. Tolerance on dimensions in inches: +/- 0.005"  
Pin size: 0.7mm (0.0276")

**Electrical characteristics:**

Winding ratio: 1+1:2+2  
 DC resistance ( +/- 15%):  
 Primaries: 10.3 + 10.3. Secondaries: 59.5 + 59.5  
 Impedance: primaries: 150 ohms + 150 ohms  
 secondaries: 600 ohms + 600 ohms  
 Inductance, measured at 1kHz, 0.27V  
 (series equivalent circuit):  
 Primary: 125mH + 125mH (nominal)  
 Secondary: 500mH + 500mH (nominal)  
 Proof voltage: primaries to screen: 1kVrms  
 screen to secondaries: 1kVrms  
 Frequency range: 30Hz - 35kHz +/- 1.5dB.  
 Power: 100mW @ 300Hz and 1mW @ 30Hz  
 Distortion: less than 1% T.H.D. 600 ohms 30Hz - 35kHz  
 measured at 0dBm. See page 2  
 Operating temperature range: 0 to +70°C  
 Storage temperature range: -25°C to + 120°C  
**N.B. Do not pass DC through windings**

**Materials: all materials are UL94V-0 rated**

Bobbin and box material: FR530  
 UL file number: E69578(M)  
 or 'Polyplastics Co. Ltd  
 Material name: 1140 A(C)  
 UL file no. E109088(M)  
 2-part epoxy resin type 3300A and 3300B  
 UL file number 218090  
 or Epoxylite EIP4728: UL file no. E143115  
 Core: class B (49% Ni) EE laminations  
 Winding wire: ECW. UL file no. E174837  
 Tape: 3M No. 56 polyester or equivalent




**Walters Group Holdings Ltd.**  
 Unit 5, Oxonian Park, Langford Locks,  
 Kidlington, Oxfordshire. OX5 1FP  
 Tel: (01865) 855085 Fax: (01865) 855075  
 Website: www.oep.co.uk

DESCRIPTION	ISSUE	DATE	DRAWN	CHECKED	DRAWING NUMBER
Specification for A262A2E page 1 of 2	1	04/05/04	CS		<b>A262A2E</b>
	5	21/05/08	CS		
	6	27/03/08	CS		
	7	04/07/12	CS		


Scale: nts

All dimensions in mm unless stated otherwise


Insertion loss: source impedance 600R, level 0dBm, primaries in series, secondaries in series and loaded with 2320R

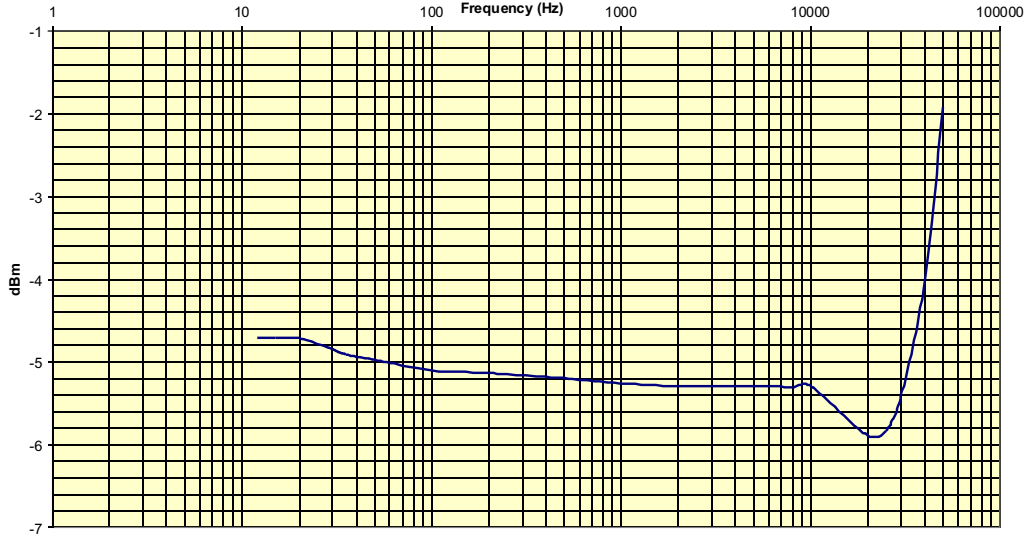



Return loss: source impedance 50R, level 0dBu, primary windings in series, secondaries in series loaded with 2320R

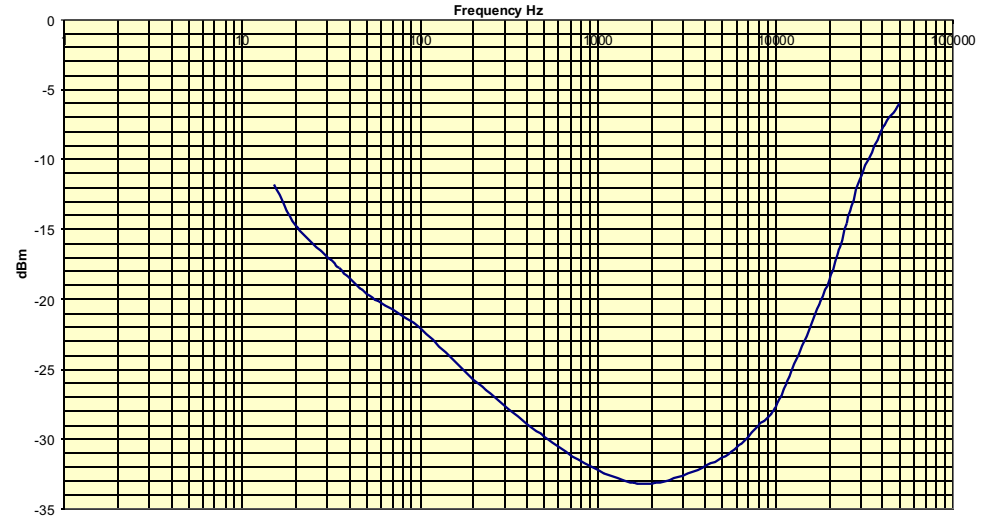

Frequency response: primary windings in series, source impedance: 600R, level: 0dBm, secondaries in series and loaded with 2320R

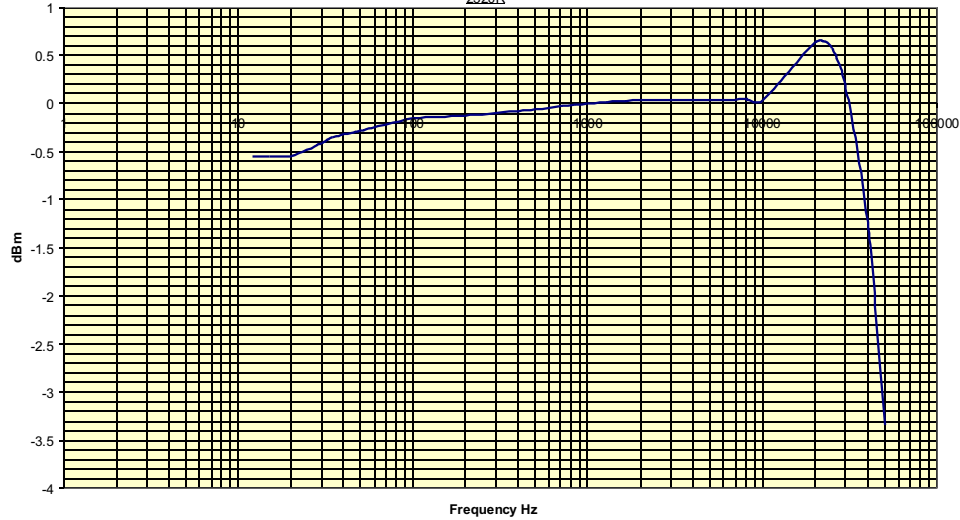

Distortion: primary windings in series, source impedance: 600R level 0dBm, secondaries in series and loaded with 2320R

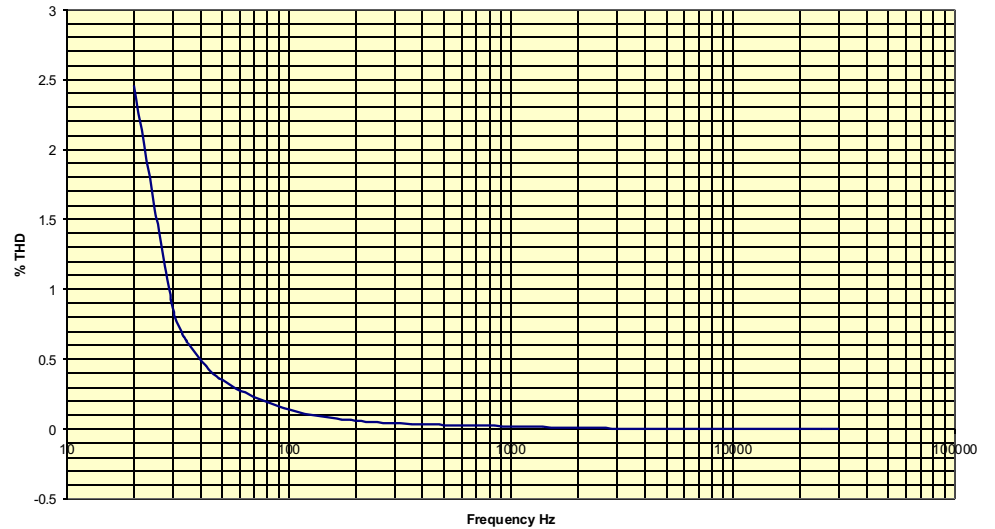

**Walters Group Holdings Ltd.**  
 Unit 5, Oxonian Park, Langford Locks,  
 Kidlington, Oxfordshire. OX5 1FP  
 Tel: (01865) 855085 Fax: (01865) 855075  
 Website: www.oep.co.uk

DESCRIPTION	ISSUE	DATE	DRAWN	CHECKED	DRAWING NUMBER
Specification for A262A2E page 2 of 2	1	04/05/04	CS		<b>A262A2E</b>
	5	21/05/08	CS		
	6	27/03/08	CS		
	7	04/07/12	CS		

Scale:nts

All dimensions in mm unless stated otherwise